

Vertex S

BACKSHEET MONOCRYSTALLINE MODULE

PRODUCT: TSM-DE09.05
POWER RANGE: 380-395W

395W+

MAXIMUM POWER OUTPUT

0/+5W

POSITIVE POWER TOLERANCE

20.5%

MAXIMUM EFFICIENCY



Outstanding Visual Appearance

- Designed with aesthetics in mind
- Ultra-thin, virtually invisible busbars
- Excellent cell color control by machine selection



Small in size, big on power

- Generates up to 395 W, 20.5 % module efficiency with high density interconnect technology
- Multi-busbar technology for better light trapping, lower series resistance, improved current collection and enhanced reliability
- Excellent low light performance (IAM) with cell process and module material optimization




Universal solution for residential and C&I rooftops

- Designed for compatibility with existing mainstream inverters, optimizers and mounting systems
- Perfect size and low weight for easy handling. Optimized transportation cost
- Reduces installation cost with higher power bin and efficiency
- Flexible installation solutions for system deployment




High Reliability

- 15 year product warranty
- 25 year linear performance warranty with low degradation
- Mechanical performance up to 6,000 Pa snow load and 4,000 Pa wind load

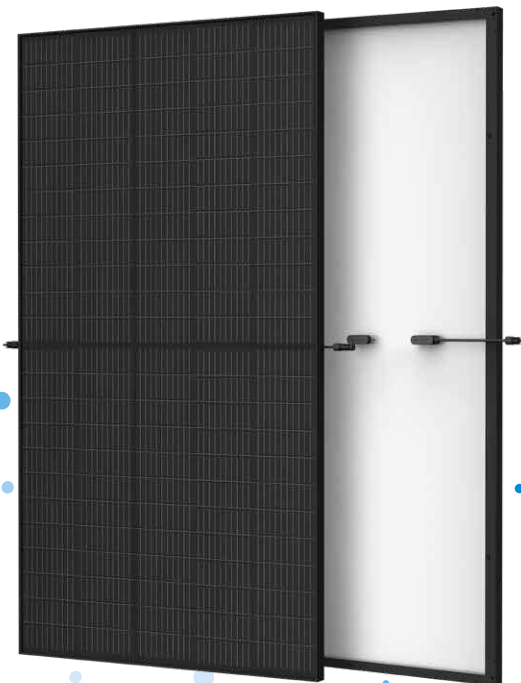

Trina Solar's Backsheet Performance Warranty

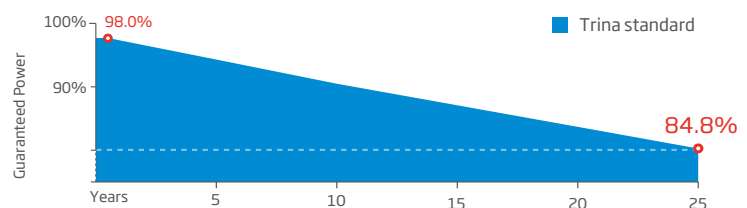


Comprehensive Product and System Certificates




IEC61215/IEC61730/IEC61701/IEC62716
ISO 9001: Quality Management System
ISO 14001: Environmental Management System
ISO14064: Greenhouse Gases Emissions Verification
ISO45001: Occupational Health and Safety Management System


DIMENSIONS OF PV MODULE (mm)

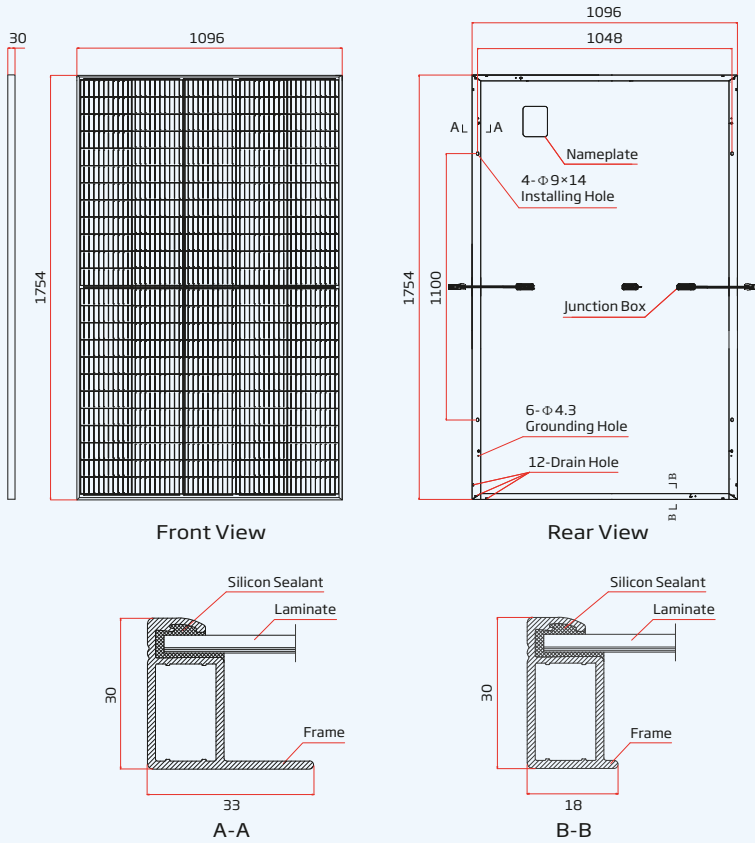

I-V CURVES OF PV MODULE (390 W)

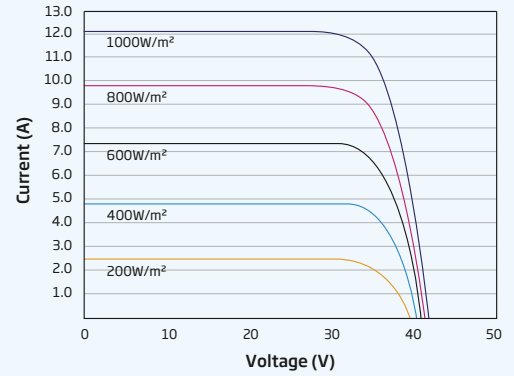

P-V CURVES OF PV MODULE (390 W)

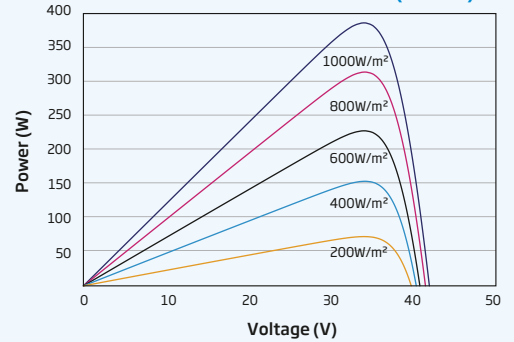

ELECTRICAL DATA (STC)

	TSM-380 DE09.05	TSM-385 DE09.05	TSM-390 DE09.05	TSM-395 DE09.05
Peak Power Watts- P_{MAX} (Wp)*	380	385	390	395
Power Tolerance- P_{MAX} (W)	0/+5	0/+5	0/+5	0/+5
Maximum Power Voltage- V_{MPP} (V)	33.4	33.6	33.8	34.0
Maximum Power Current- I_{MPP} (A)	11.38	11.46	11.54	11.62
Open Circuit Voltage- V_{oc} (V)	40.4	40.6	40.8	41.0
Short Circuit Current- I_{sc} (A)	12.00	12.07	12.14	12.21
Module Efficiency η (%)	19.8	20.0	20.3	20.5

STC: Irradiance 1000 W/m², Cell Temperature 25°C, Air Mass AM1.5 *Measuring tolerance: ±3%

MECHANICAL DATA

Solar Cells	Monocrystalline
No. of cells	120 cells
Module Dimensions	1754×1096×30 mm
Weight	21.0 kg
Glass	3.2 mm, High Transmission, AR Coated Heat Strengthened Glass
Encapsulant material	EVA/POE
Backsheet	Black-White
Frame	30 mm Anodized Aluminium Alloy
J-Box	IP 68 rated
Cables	Photovoltaic Technology Cable 4.0 mm ² Portrait: 280/280 mm Landscape: 1100/1100 mm
Connector	TS4/MC4 EV02*

*Special order only

ELECTRICAL DATA (NOCT)

	TSM-380 DE09.05	TSM-385 DE09.05	TSM-390 DE09.05	TSM-395 DE09.05
Maximum Power- P_{MAX} (Wp)	286	290	294	298
Maximum Power Voltage- V_{MPP} (V)	31.4	31.6	31.8	31.9
Maximum Power Current- I_{MPP} (A)	9.12	9.18	9.24	9.32
Open Circuit Voltage- V_{oc} (V)	38.0	38.2	38.4	38.6
Short Circuit Current- I_{sc} (A)	9.67	9.73	9.78	9.84

NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1m/s.

TEMPERATURE RATINGS

NOCT (Nominal Operating Cell Temperature)	43°C (±2 K)
Temperature Coefficient of P_{MAX}	-0.34%/K
Temperature Coefficient of V_{OC}	-0.25%/K
Temperature Coefficient of I_{SC}	0.04%/K

MAXIMUM RATINGS

Operational Temperature	-40 to +85°C
Maximum System Voltage	1500 V DC (IEC)
Max Series Fuse Rating	20 A

WARRANTY

- 15 year Product Workmanship Warranty
- 25 year Power Warranty
- 2% first year Degradation
- 0.55% Annual Power Degradation

(Please refer to product warranty for details)

PACKAGING CONFIGURATION

Modules per box	36 pieces
Modules per 40' container	936 pieces